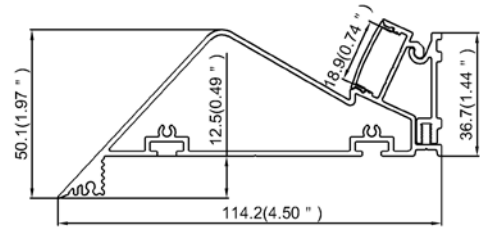


Model : ALP193







**Dimension**



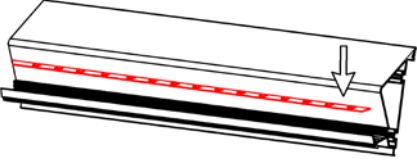
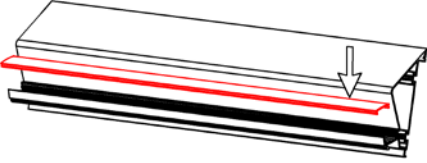
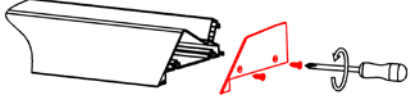
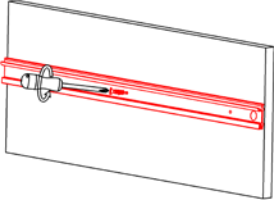
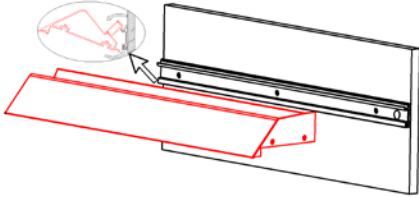
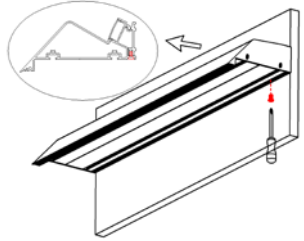
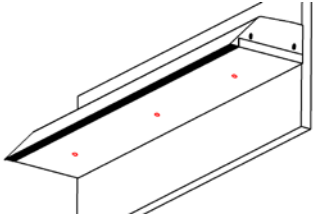
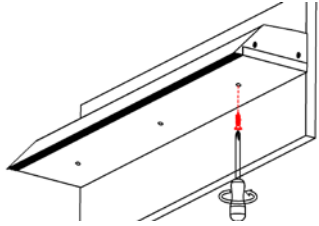
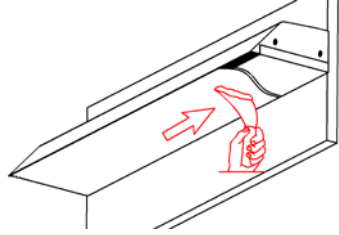
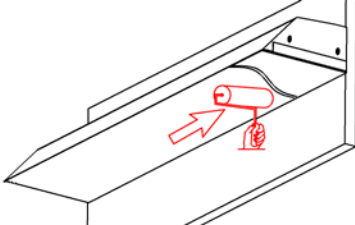
**Specification**

Aluminum Profile	6063-T5
Diffuser	PC diffused cover / PMMA semi-clear cover/PMMA opal matte cover/PMMA clear cover
Length	2000mm / 2500mm / 3000mm
Weight	1.793kg/m
Max LED Strip Width	18mm
Max Power	18W/m
Beam angle	100°
Finish	Silver / Black anodized , Powder coated white / black or other colors
Installation	Surface

**Accessories**

			
End Cap(Metal)	LED Strip	180° Connector(Metal)	90° Connector(Metal)

**Steps of Installation**

<p>1. Stick the LED strip</p> 	<p>2. Click the diffused cover</p> 	<p>3. Lock the end caps with screws</p> 
<p>4. Mounting the profile B on the wall</p> 	<p>5. Install the profile A with profile B</p> 	<p>5. Fix the fixture to the drywall with screw</p> 
<p>6. Drill the holes for fixed screws</p> 	<p>7. Install the drywall with screws.</p> 	<p>8. Plaster on the fixture &amp; drywall</p> 
<p>9. Painting on the fixture &amp; drywall</p> 	<p>10. Installation completed .</p> 