
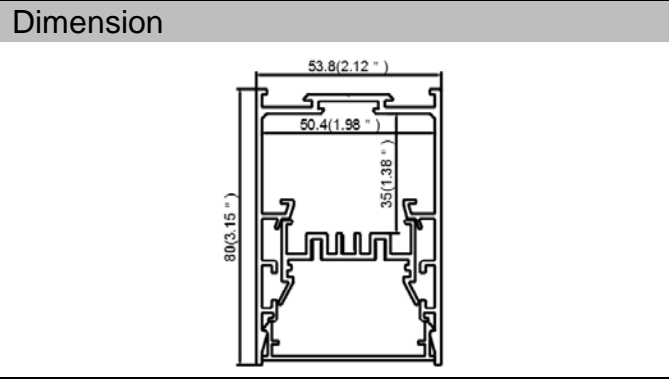


Model : LS50

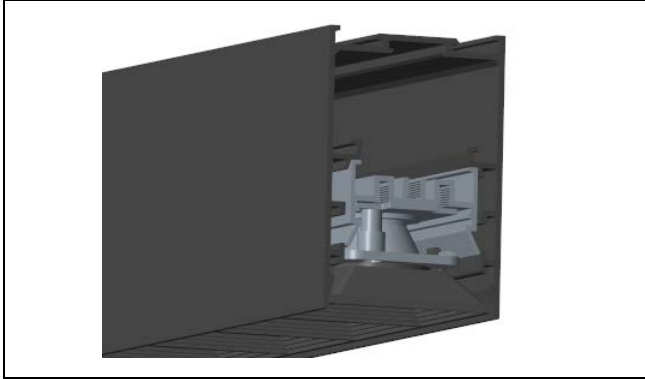


**Specification**

Aluminum Profile	6065-T5
Diffuser	Shown below
Length	2000 / 2500 /3000mm
Weight	2.714 kg/m
Max Strip Width	24mm
Max Power	35 W/m
Beam angle	Shown below
Finish	Silver /Black anodized , Powder coated white /black or other colors
Installation	Pendant

**Accessories**

Outside clip(Stainless Steel)	Inside clip(Stainless Steel)	Steel wire	LED module
CNC End cap	Prismatic cover	Reflector: 15° , 30° , 45°	Wall washer

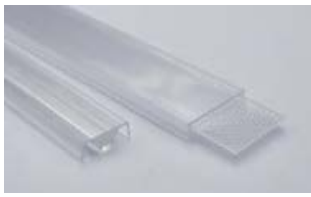


Symmetrical+ lens



180° connector



90° connector

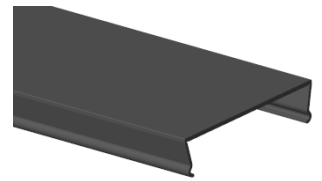


Blind cover




High reflective louver

**Steps of Installation**


1. Install the end cap

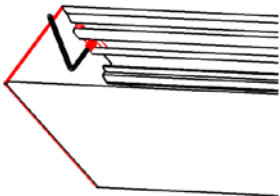


2. Fix the driver & safety cable&inside clip

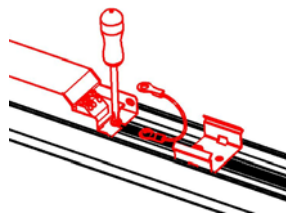

3. Fix the led module

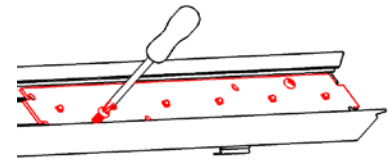


4. Fix the reflector

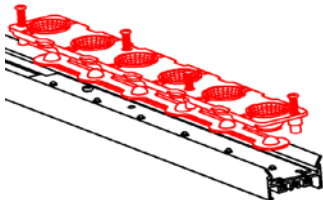


5. Push the anti-glare cover




6. Fix the gear tray and the safety wire

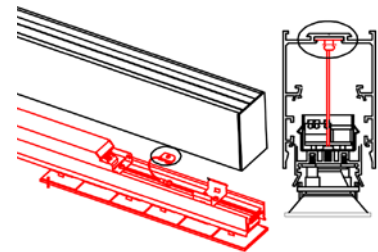


7. Fix the blind cover

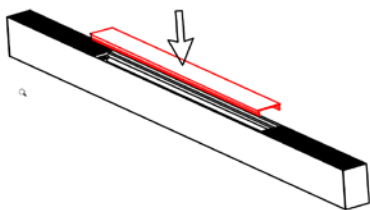


8. Fix the steel wire

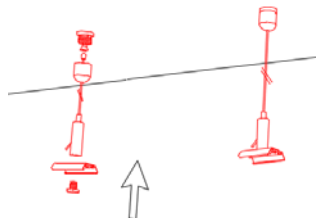

9. Fix the profile



9. Adjust the length of the cable

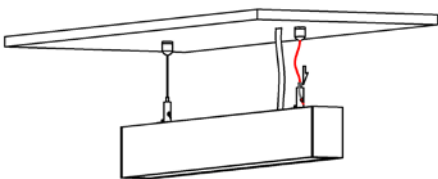

10. Installation completed.

