



Model : LS50-U

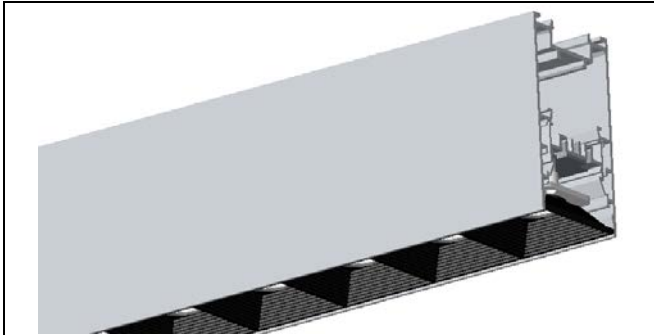

Dimension



Specification

| | |
|------------------|---|
| Aluminum Profile | 6065-T5 |
| Diffuser | Shown below |
| Length | 2000 / 2500 / 3000mm |
| Weight | 2.397 kg/m (Including PC diffused cover) |
| Max Strip Width | 32mm / 27mm |
| Max Power | 45 W/m |
| Beam angle | Shown below |
| Finish | Silver /Black anodized , Powder coated white /black or other colors |
| Installation | Pendant |

Accessories

| | | | |
|------------------|--------------------|---------------------------|------------------------|
| | | | |
| End cap(Metal) | Inside clip(Metal) | Suspension wire | Suspension bracket |
| | | | |
| LED Module | Safety cable | PC diffused cover | Prismatic cover |
| | | | |
| Prismatic 3 in 1 | Prismatic + lens | Reflector:15° , 30° , 45° | High reflective louver |



Blind cover




90° connector




180° connector

Steps of Installation


1. Fix LED module on the profile

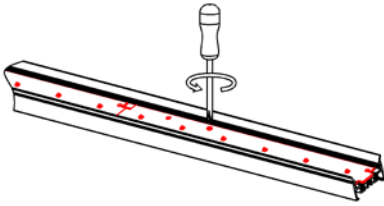


2. Fix the reflector parts with screws

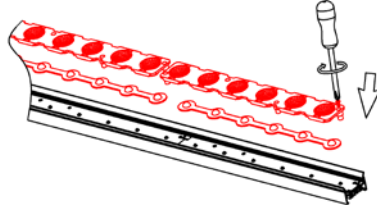

3. Click the trim of reflector parts .

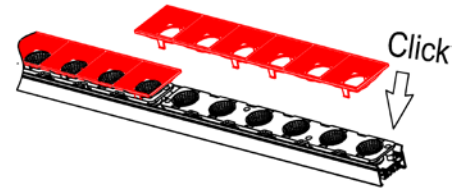


4. Fix the driver & safety cable & clips

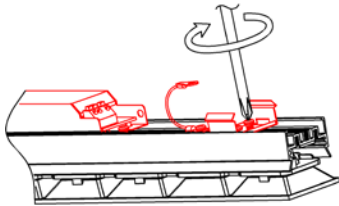


5. Drill the hole for power cable




6. Stick the led strips

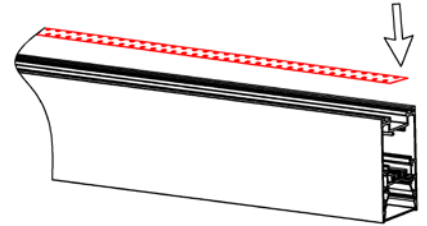


7. Click the diffused cover .

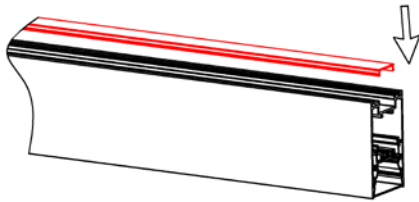


8. Assemble the suspension parts

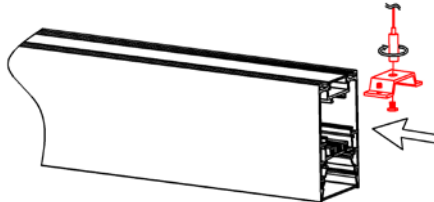


9. Assemble the end caps

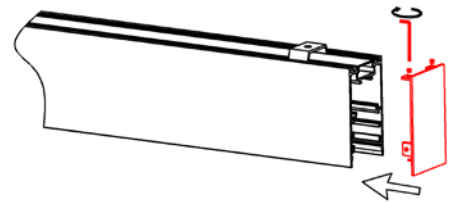


10. Fix the end caps with screws

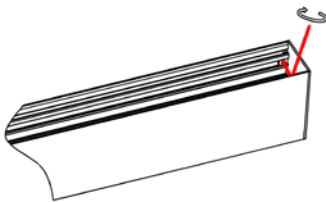


11. Lock the safety cable tightly.

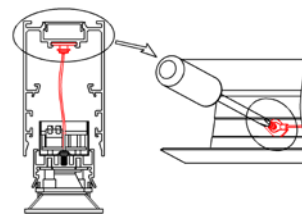

12. Click the assembled part.

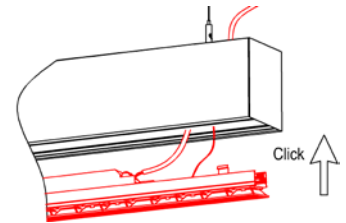

13. Adjust the length of hanging cable

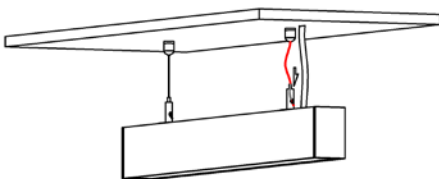

14. Installation completed .

